



Thales Turntable

TTT-Slim




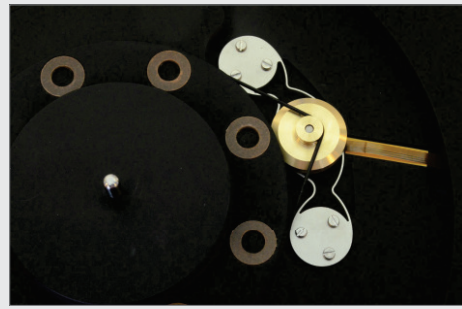

8

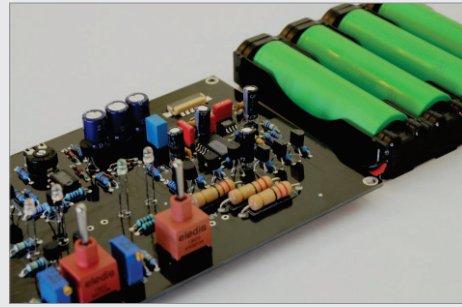

9

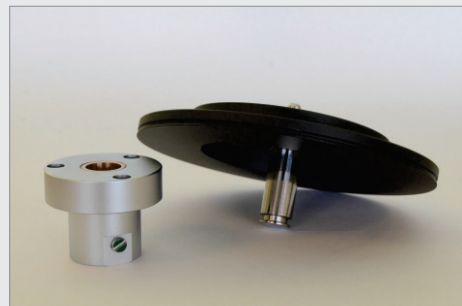

10





- 1 Connection for charger
- 2 Tonearm-base for Thales Easy
option: adapter for any 9" tonearm
- 3 Main-Switch: ON-OFF-CHARGE
Control LED for charge condition
- 4 Speed setting: 33 $\frac{1}{3}$ or 45 rpm
- 5 Tangential pivoted tonearm Thales Easy
- 6 Clamp with highly effective damping inlay
- 7 Immersed platter with high-density inlay
- 8 Short-belt-drive system with motor-
suspension
- 9 Battery power source and drive electronics
- 10 Main bearing with hardened, hand-polished
shaft and chrome-plated brass housing

Even the Thales tonearm team cannot turn upside down the laws of physics. But where does it come from that this slim and elegant turntable produces such an overwhelming and nuanced sound experience? The secret lies in the sophisticated art of engineering and craftsmanship of its designers: Besides the elaborate construction and the most precise workmanship the TTT SLIM is carefully tuned to our tangential pivoted tonearm THALES EASY.

Due to many years of experience in the field of analogue tracking we were able to develop such a compact turntable that meets the highest requirements at the same time. Its delicate and compact design actually ensures the mechanical stability that could never be achieved by a more extensive concept. Each of the seventy parts has been carefully designed to perform its function in the overall concept perfectly. The turntable is being manufactured in our workshop in Switzerland.

Our short-belt-drive system transfers the moment of inertia of motor and flywheel effectively to the main platter. Since the rotary-speed of motor and flywheel is 12x higher than that of the platter they are very important sonically. This hard coupling has been made possible by a carefully calculated spring-element that keeps all vibration away from the chassis but does not allow the motor to move axially.

The most modern battery-drive system (peak capacity 100 W) offers more than twenty hours of listening without connection to the supply network. The battery will be fully charged within a few hours. Together with our brass bearing, the high density inlay of the platter, and the carefully designed spikes a quality in music playback is achieved that lets everyone forget about all the technical details.

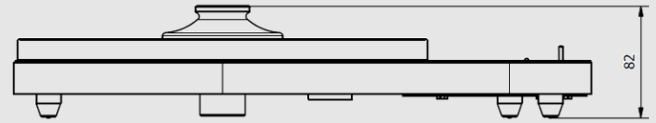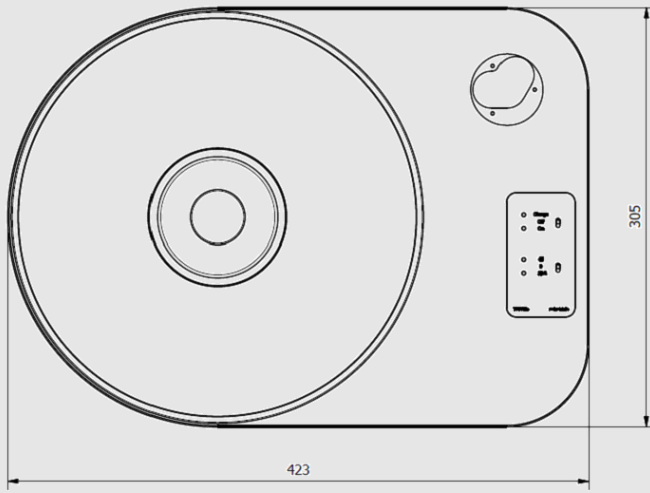

Technical Specifications

- 3-phase motor underneath platter
- Short belt drive system with flywheel
- High-precision bearing, hardened
- High density mat as platter inlay
- Decoupling ball element feet
- Integrated drive electronics
- Clamp with high density inlay
- Black finish with silver edges

Turntable Specifications

- Turntable speed: 33 $\frac{1}{3}$ rpm, 45rpm
- Wow and flutter at 33rpm, IEC 386: $\pm 0,06\%$
- Rumble: -58dB (unweighted)
- Weight: 11kg
- Input voltage for charger: 100-240V, 50-60Hz
- Battery service life: 20h