



Assembly Instructions for Reference RL02



1. Remove the screws from the aluminum bracket



2. Place the aluminum side support chassis and screw them back at the same holes, as seen in the 2nd picture

The top and bottom side chassis should not be replaced. Only the intermediate shelves can be adjusted on any height

3. When all the side chassis are placed, put the central chassis on them





TANDEM AUDIO

9. Nikomahou, Thessaloniki, Greece

T: 0030 2310 283505

www.tandem-audio.com, info@tandem-audio.com

4. Place the screws (3 on each side for every chassis)



5. The rack standing points (RSP) consist of 3 pieces, as seen in the picture



6. The top piece is screwed into the column.



TANDEM AUDIO

9. Nikomahou, Thessaloniki, Greece

T: 0030 2310 283505


www.tandem-audio.com, info@tandem-audio.com



7. Place each RSP by the side of its column



8. The rack is placed on the RSPs

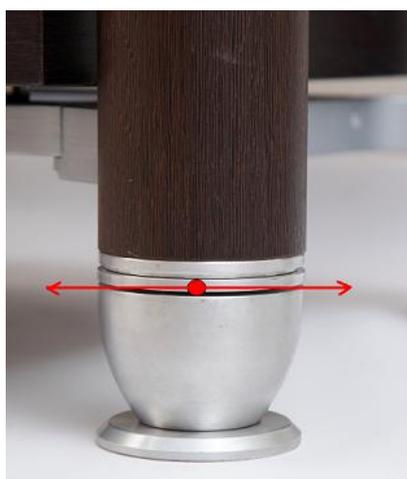

By rotating the top piece of the RSP left and right, the rack is leveled on uneven floors



TANDEM AUDIO

9. Nikomahou, Thessaloniki, Greece

T: 0030 2310 283505

www.tandem-audio.com, info@tandem-audio.com

9. Place the shelves



10. For the best implementation, use a screw for the leveling of the shelf as seen in the picture



11. The rack is ready